

N2S-MHM203

Lanner N2S NIC Module With
ConnectX-6 & 2x 100G QSFP28 Ports




■ Features

- Mellanox ConnectX-6
- Lanner N2S Standard
- 2x 100 GbE QSFP28 Ports
- 2x Gen4 PCIe*8

■ Specifications

Chipset	Mellanox ConnectX-6
Interface	2x Gen4 PCIe*8 Golden Finger w/ 1x PCIe*16 Signal
Connector	2x 100 GbE QSFP28
Compatibility	Lanner Network Appliance
Temperature	Operating: 0°C~40°C Storage: -40°C~70°C
Humidity	5%~90% Non-condensing
Mechanical	Dimension (W x D): 193 x 150 mm Weight: TBD

■ Product I/O View

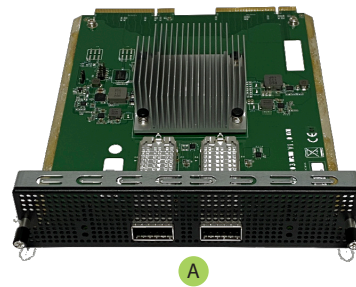

A 2x 100 GbE QSFP28

■ Ordering Information

N2S-MHM203A	Lanner N2S NIC Module with 2x 100GbE QSFP28, 1x PCIE16, Mellanox Multi-Host Support
N2S-MHM203B	Lanner N2S NIC Module with 2x 100GbE QSFP28, 1x PCIE16

N2S-MHM203

NIC Module