


N2S-MHM201

NIC Module With Dual 100G QSFP28 Ports And Mellanox® ConnectX-4 Ethernet Controller

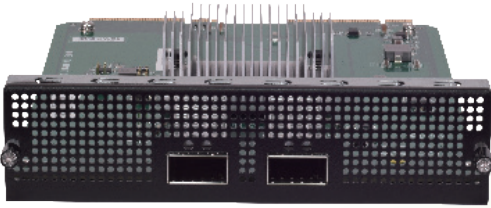

■ Features


- Mellanox ConnectX-4
- 2x 100G QSFP28 Ports
- 2x Gen3 PCIe*8 Golden Finger

■ Specifications

Chipset	Mellanox ConnectX-4
Interface	2 x Gen3 PCIe*8 Golden Finger
Connector	2 x QSF28 Connectors
Temperature	
Operating	0 ~ 40°C
Storage	-40~70°C
Humidity	5%~90% Non-condensing
Mechanical	
Dimension (W x D)	193 x 150 mm
Weight	-
Certification	
CE	Class A
FCC	Class A
UL	Comply

*When using this card, BIOS needs to be updated for the PCIe x16 signal.

■ Product I/O View

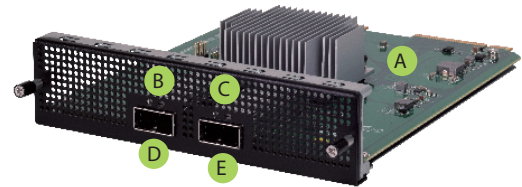

- A PCB
- B C LED Indicators
- D E QSFP28 Connectors

N2S-MHM201

NIC Module

■ Ordering Information

N2S-MHM201 2x QSFP28, 100G Module

V1-2023.11.20

Lanner

© Lanner Electronics Inc. All rights reserved.
All product specifications are subject to change without notice.
contact@lannerinc.com | www.lannerinc.com