

# PGN-750

Swappable 5G Radio Modem  
for Mission-Critical Communications



Images are for reference only. See ordering information for SKU details.

## ■ Features

- 5G sub6 Radio Modem Compatible with Lanner Vehicle PC
- 2x nano SIM Card Readers, 4x Antenna Jack, with antenna / cable kit
- SATA connector with USB 3.0 signal and Hot Swappable Capability
- 5G Failover for Constant Operations
- Designed for Network Failover and Vehicle Applications
- Swappable Caddy
- Supports NSA and SA modes

## ■ Preliminary Specifications

### 5G Modem Card

PGN-750D • 5G sub6 Radio Modem

### Interface

Connector SATA connector with USB 3.0 signal

M.2 1x M.2 3042/50/52 B-Key socket with dual-SIM card reader

### System Compatibility

Lanner Vehicle PC V3S, V6S, ISD-V330, LEC-2290, EAI-V330, EAI-R530

### Temperature

Operating -40~70°C Operating, -40~85°C Non-Operating

### Humidity


5%~90% RH, Non-condensing

### Mechanical

Dimension 76 x 115.97 x 145 mm  
(W x D x H)

Weight 0.4 kg

## ■ Product I/O View

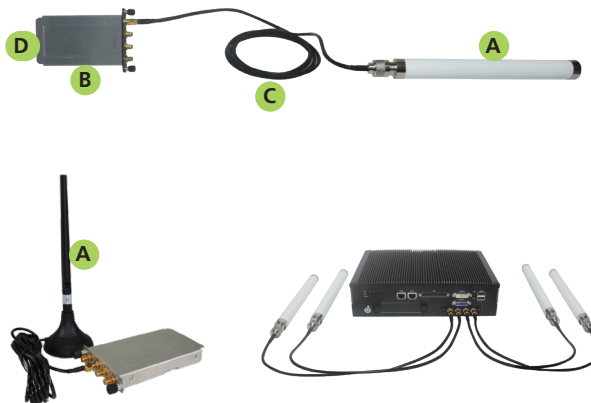

- A** 5G Antenna (two types)
- B** SIM slots
- C** Antenna cable
- D** SATA connector with USB 3.0 signal

## ■ Ordering Information

PGN-750D

PGN-750 Caddy without 5G module.

v4-2024.08.13

Lanner

© Lanner Electronics Inc. All rights reserved.  
All product specifications are subject to change without notice.  
contact@lannerinc.com | www.lannerinc.com

PGN-750

5G Radio Modem